


Principle Reduced Pressure Backflow Preventer : Model BX, CX

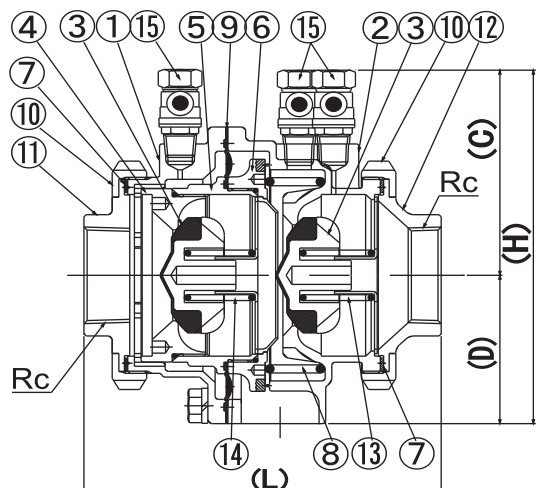

SCREWED END JIS (BSP) 20mm to 50mm

Materials:

	Name of parts	Material
1	Body A	Bronze / Stainless steel
2	Body B	Bronze / Stainless steel
3	Disc	EPDM, PPS
4	Housing A	PPS
5	Housing B	Bronze
6	Disc holder	EPDM, Brass
7	Gasket	EPDM
8	Spring C	Stainless steel
9	Diaphragm	EPDM / FKM
10	Union nut	Bronze
11	Joint A	Bronze
12	Joint B	Bronze
13	Spring B	Stainless steel
14	Spring A	Stainless steel
15	Test cock	Bronze


Dimensions:

UNIT:mm

BORE	L	H	C	D	E	Material	MODEL	Connection Standard
20	127	121	75	46	min.26	Bronze or Stainless Steel	BX · CX	JIS B 0203 & BS21
25	127	121	75	46	min.26		BX · CX	
30	161	175	102	73	min.50	Bronze	BX · CX	
40	161	175	102	73	min.50		BX · CX	
50	161	175	102	73	min.50		CX	
50	181	175	102	73	min.50		BX	


REMARKS FOR INSTALLATION

Hopper must be fixed to drain pipe

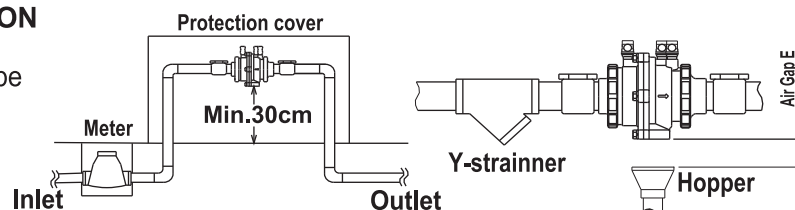


Pressure characteristics:

BX 20mm to 50mm

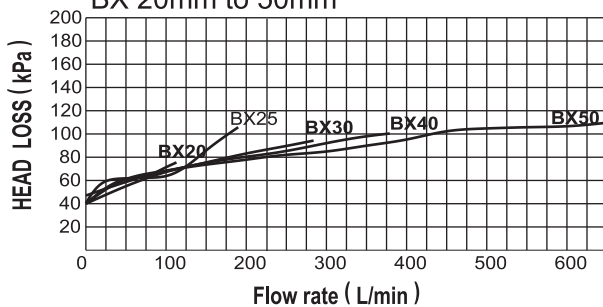

CX 20mm to 50mm

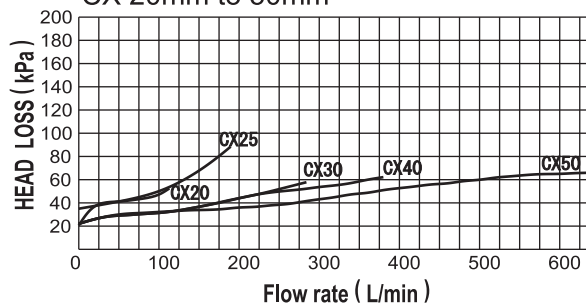

ISO9001 Certified

Japanese Industrial Standard Permitted Factory
Japan Water Works Association Authorized Factory

KKK KANE KOGYO Co., Ltd.

Head office and factory : 2036 Okusa, Komaki-shi, Aichi-ken 485-0802 Japan

TEL : 81-568-79-2476 FAX : 81-568-79-6422

Web site: <http://www.kkk-kane.co.jp> E-mail: overseasales@kkk-kane.co.jp

Edition 12-1/2003