
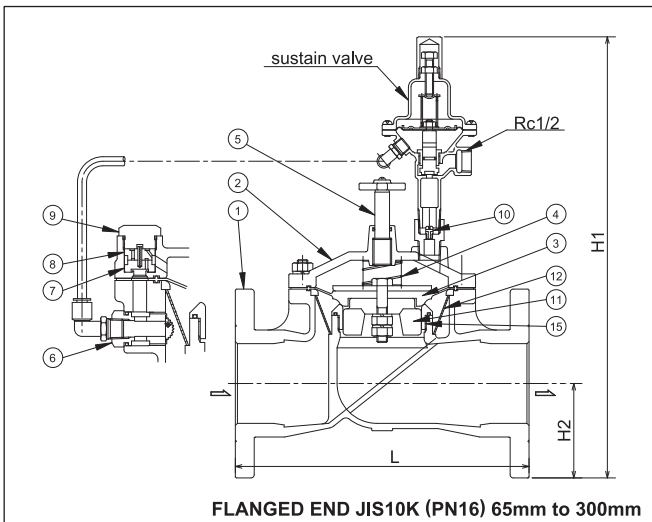


Constant Head Pilot Operated Float Valve With Sustaining Valve : Model DH

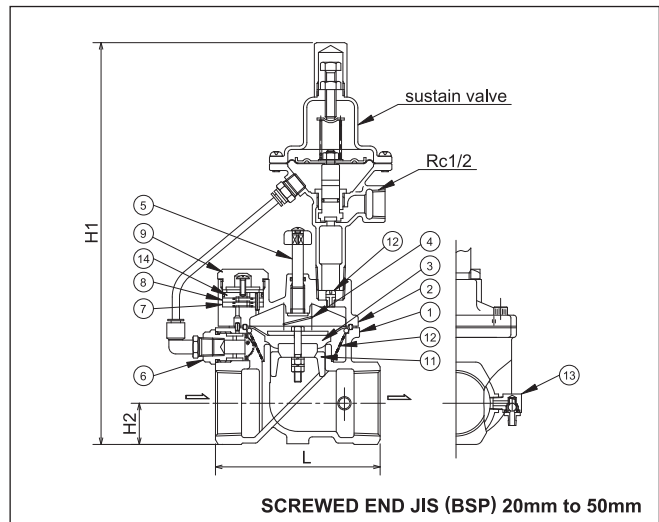

●Dimensions: Screwed end UNIT:mm

Connection Standard : JIS B 0203					
NOMINAL	20	25	32	40	50
L	90	100	110	120	140
H1	267	269	291	295	308
H2	19	21	26	30	37
END	3/4"	1"	1 1/4"	1 1/2"	2"

●Dimensions: Flanged end UNIT:mm

Connection Standard : JIS B 2240							
NOMINAL	65	80	100	150	200	250	300
L	250	284	344	460	510	630	750
H1	396	423	447	540	570	670	735
H2	87.5	92.5	105	140	165	200	222.5
FLANGE	JIS 10K						

Connection Standard : ISO 7005-3 (BS 4504)							
NOMINAL	65	80	100	150	200	250	300
L	250	284	344	460	510	630	750
H1	401	430.5	452	542.5	575	672.5	742.5
H2	92.5	100	110	142.5	170	202.5	230
FLANGE	PN16						

●Materials:

No.	Description	Material	No.	Description	Material
1	Body	Bronze	9	Cap	Brass
2	Cover	Bronze	10	Orifice	Brass
3	Diaphragm	EPDM	11	Guide	Bronze
4	Spring	Stainless Steel	12	Strainer	Stainless Steel
5	Adjustable spindle	Brass	13	Vacuum holder	Brass
6	Strainer holder	Brass	14	Resister C	Brass
7	Resister A	Brass / Plastic	15	Seat	Stainless Steel
8	Resister B*	Brass / Plastic			

ISO9001 Certified

Japanese Industrial Standard Permitted Factory
Japan Water Works Association Authorized Factory

KKK KANE KOGYO Co., Ltd.

Head office and factory : 2036 Okusa, Komaki-shi, Aichi-ken 485-0802 Japan

TEL : 81-568-79-2476 FAX : 81-568-79-6422

Web site: <http://www.kkk-kane.co.jp> E-mail: overseasales@kkk-kane.co.jp

Edition 8-1/2003