


Pressure Reducing Valve Flanged Ends : Model KRS

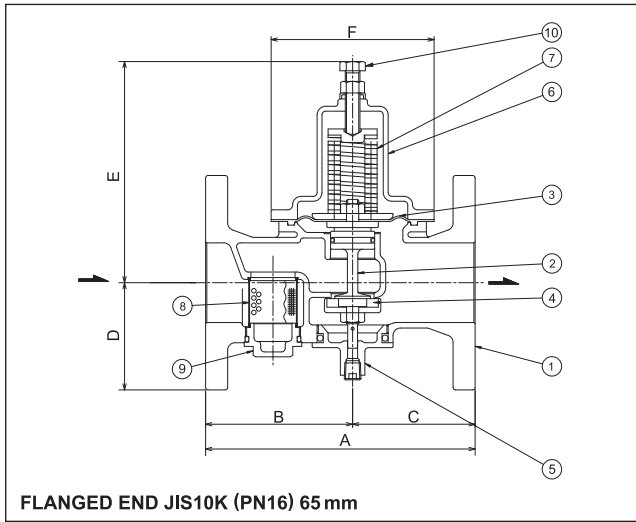

Materials:

No.	Description	Material
1	Body	Bronze
2	Spindle	Bronze
3	Diaphragm	EPDM
4	Disk	EPDM
5	Disk cap	Bronze
6	Cover	Bronze / FC *
7	Spring	Oil Temp. Wire
8	Strainer	Stainless Steel
9	Strainer cap	Bronze
10	Adjustable spindle	Brass

* 65mm Bronze 80,100mm FC

Dimensions:



unit : mm

Connection Standard : JIS B 2240								Flange
Nom. Size	A	B	C	D	E	F		
mm	inch							
65	2-1/2	220	120	100	87.5	(~188)	φ 133	JIS 10K
80	3	250	125	125	92.5	(~303)	φ 177	
100	4	290	145	145	105	(~351)	φ 200	
65	2-1/2	220	120	100	87.5	(~188)	φ 133	JIS 16K
80	3	254	127	127	100	(~303)	φ 177	
100	4	298	149	149	112.5	(~351)	φ 200	

unit : mm

Connection Standard : ISO 7005-3 (BS 4504)								Flange
Nom. Size	A	B	C	D	E	F		
mm	inch							
65	2-1/2	224	122	102	92.5	(~188)	φ 133	PN16
80	3	255	127.5	127.5	100	(~303)	φ 177	
100	4	295	147.5	147.5	110	(~351)	φ 200	
65	2-1/2	228	124	104	92.5	(~188)	φ 133	PN25
80	3	263	131.5	131.5	100	(~303)	φ 177	
100	4	307	153.5	153.5	117.5	(~351)	φ 200	

Flow characteristics:

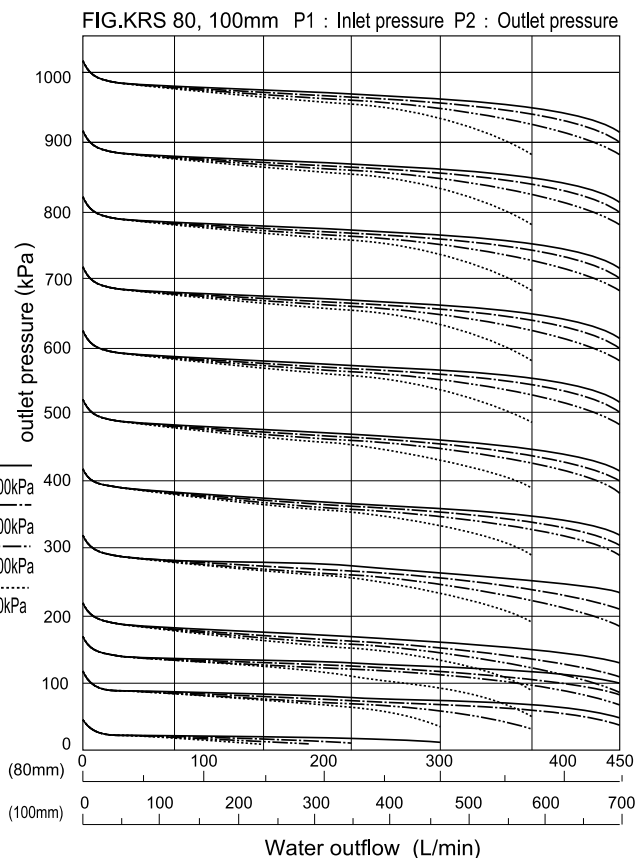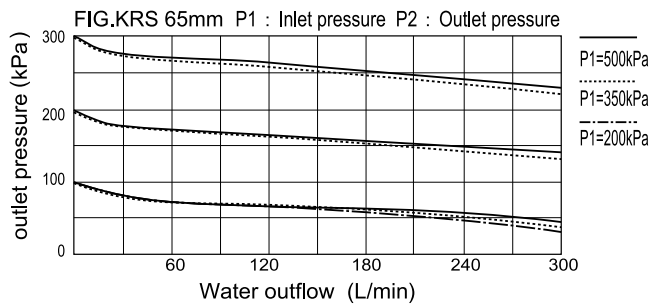

ISO9001 Certified

Japanese Industrial Standard Permitted Factory
 Japan Water Works Association Authorized Factory

KKK KANE KOGYO Co., Ltd.

Head office and factory : 2036 Okusa, Komaki-shi, Aichi-ken 485-0802 Japan

TEL : 81-568-79-2476 FAX : 81-568-79-6422

Web site: <http://www.kkk-kane.co.jp> E-mail: overseasales@kkk-kane.co.jp