


KKK BRONZE VALVES

Pressure Reducing Valve Flanged Ends : Model KRT-S

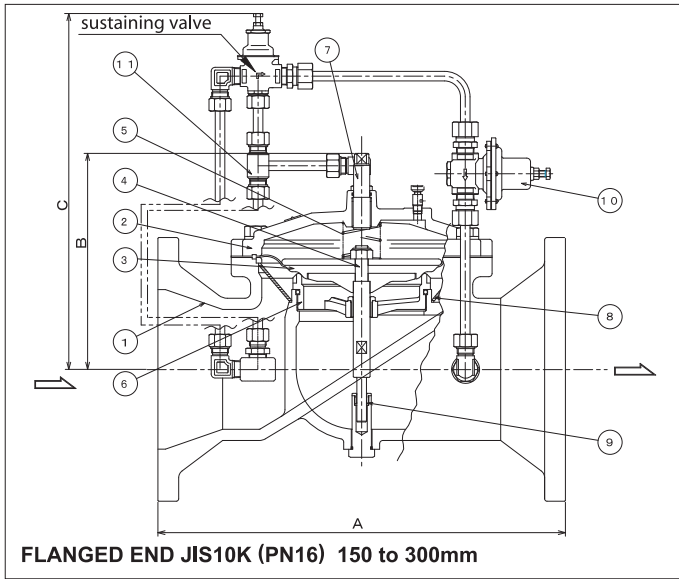

●Materials:

No.	Description	Material
1	Body	Bronze *
2	Bonnet	Bronze *
3	Diaphragm	EPDM
4	Diaphragm Shaft	Stainless Steel
5	Spring	Stainless Steel
6	Valve Seat	Bronze
7	Adjustable spindle	Brass
8	Strainer	Stainless Steel
9	Guide	Stainless Steel
10	Pilot Valve	Bronze
11	Flow Regulating	Bronze

*Body materials are changed to cast iron or ductile iron from size of 12 inchs.

●Dimensions:

UNIT:mm



Connection Standard : JIS B 2240					
Nom. size		A	B	C	Flange
mm	inch				
150	6	404	205	385	JIS 10K
200	8	510	270	470	
250	10	572	270	470	
300	12	642	445	585	
150	6	408	205	385	JIS 16K
200	8	518	270	470	
250	10	580	270	470	
300	12	654	445	585	

UNIT:mm

Connection Standard : ISO 7005-3 (BS 4504)					
Nom. size		A	B	C	Flange
mm	inch				
150	6	404	205	385	PN16
200	8	518	270	470	
250	10	580	270	470	
300	12	650	445	585	
150	6	412	205	385	PN25*
200	8	526	270	470	
250	10	588	270	470	
300	12	658	445	585	

*available on request

●Flow characteristics:

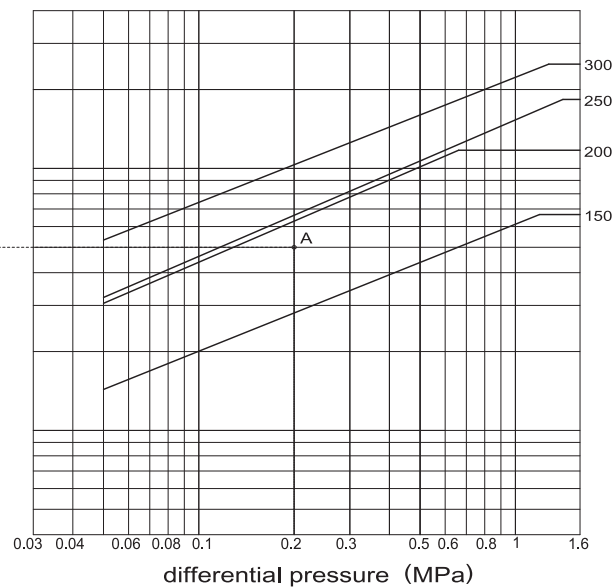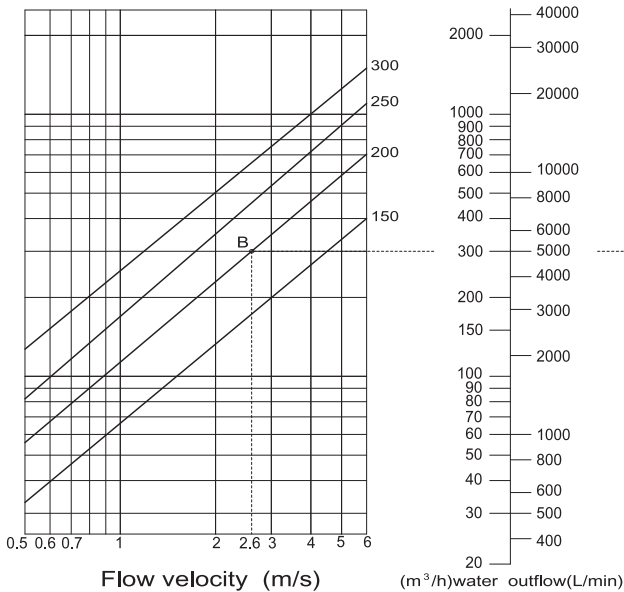

ISO9001 Certified

Japanese Industrial Standard Permitted Factory
Japan Water Works Association Authorized Factory

KKK KANE KOGYO Co., Ltd.

Head office and factory : 2036 Okusa, Komaki-shi, Aichi-ken 485-0802 Japan

TEL : 81-568-79-2476 FAX : 81-568-79-6422

Web site: <http://www.kkk-kane.co.jp> E-mail: overseasales@kkk-kane.co.jp

Edition 8-1/2003